

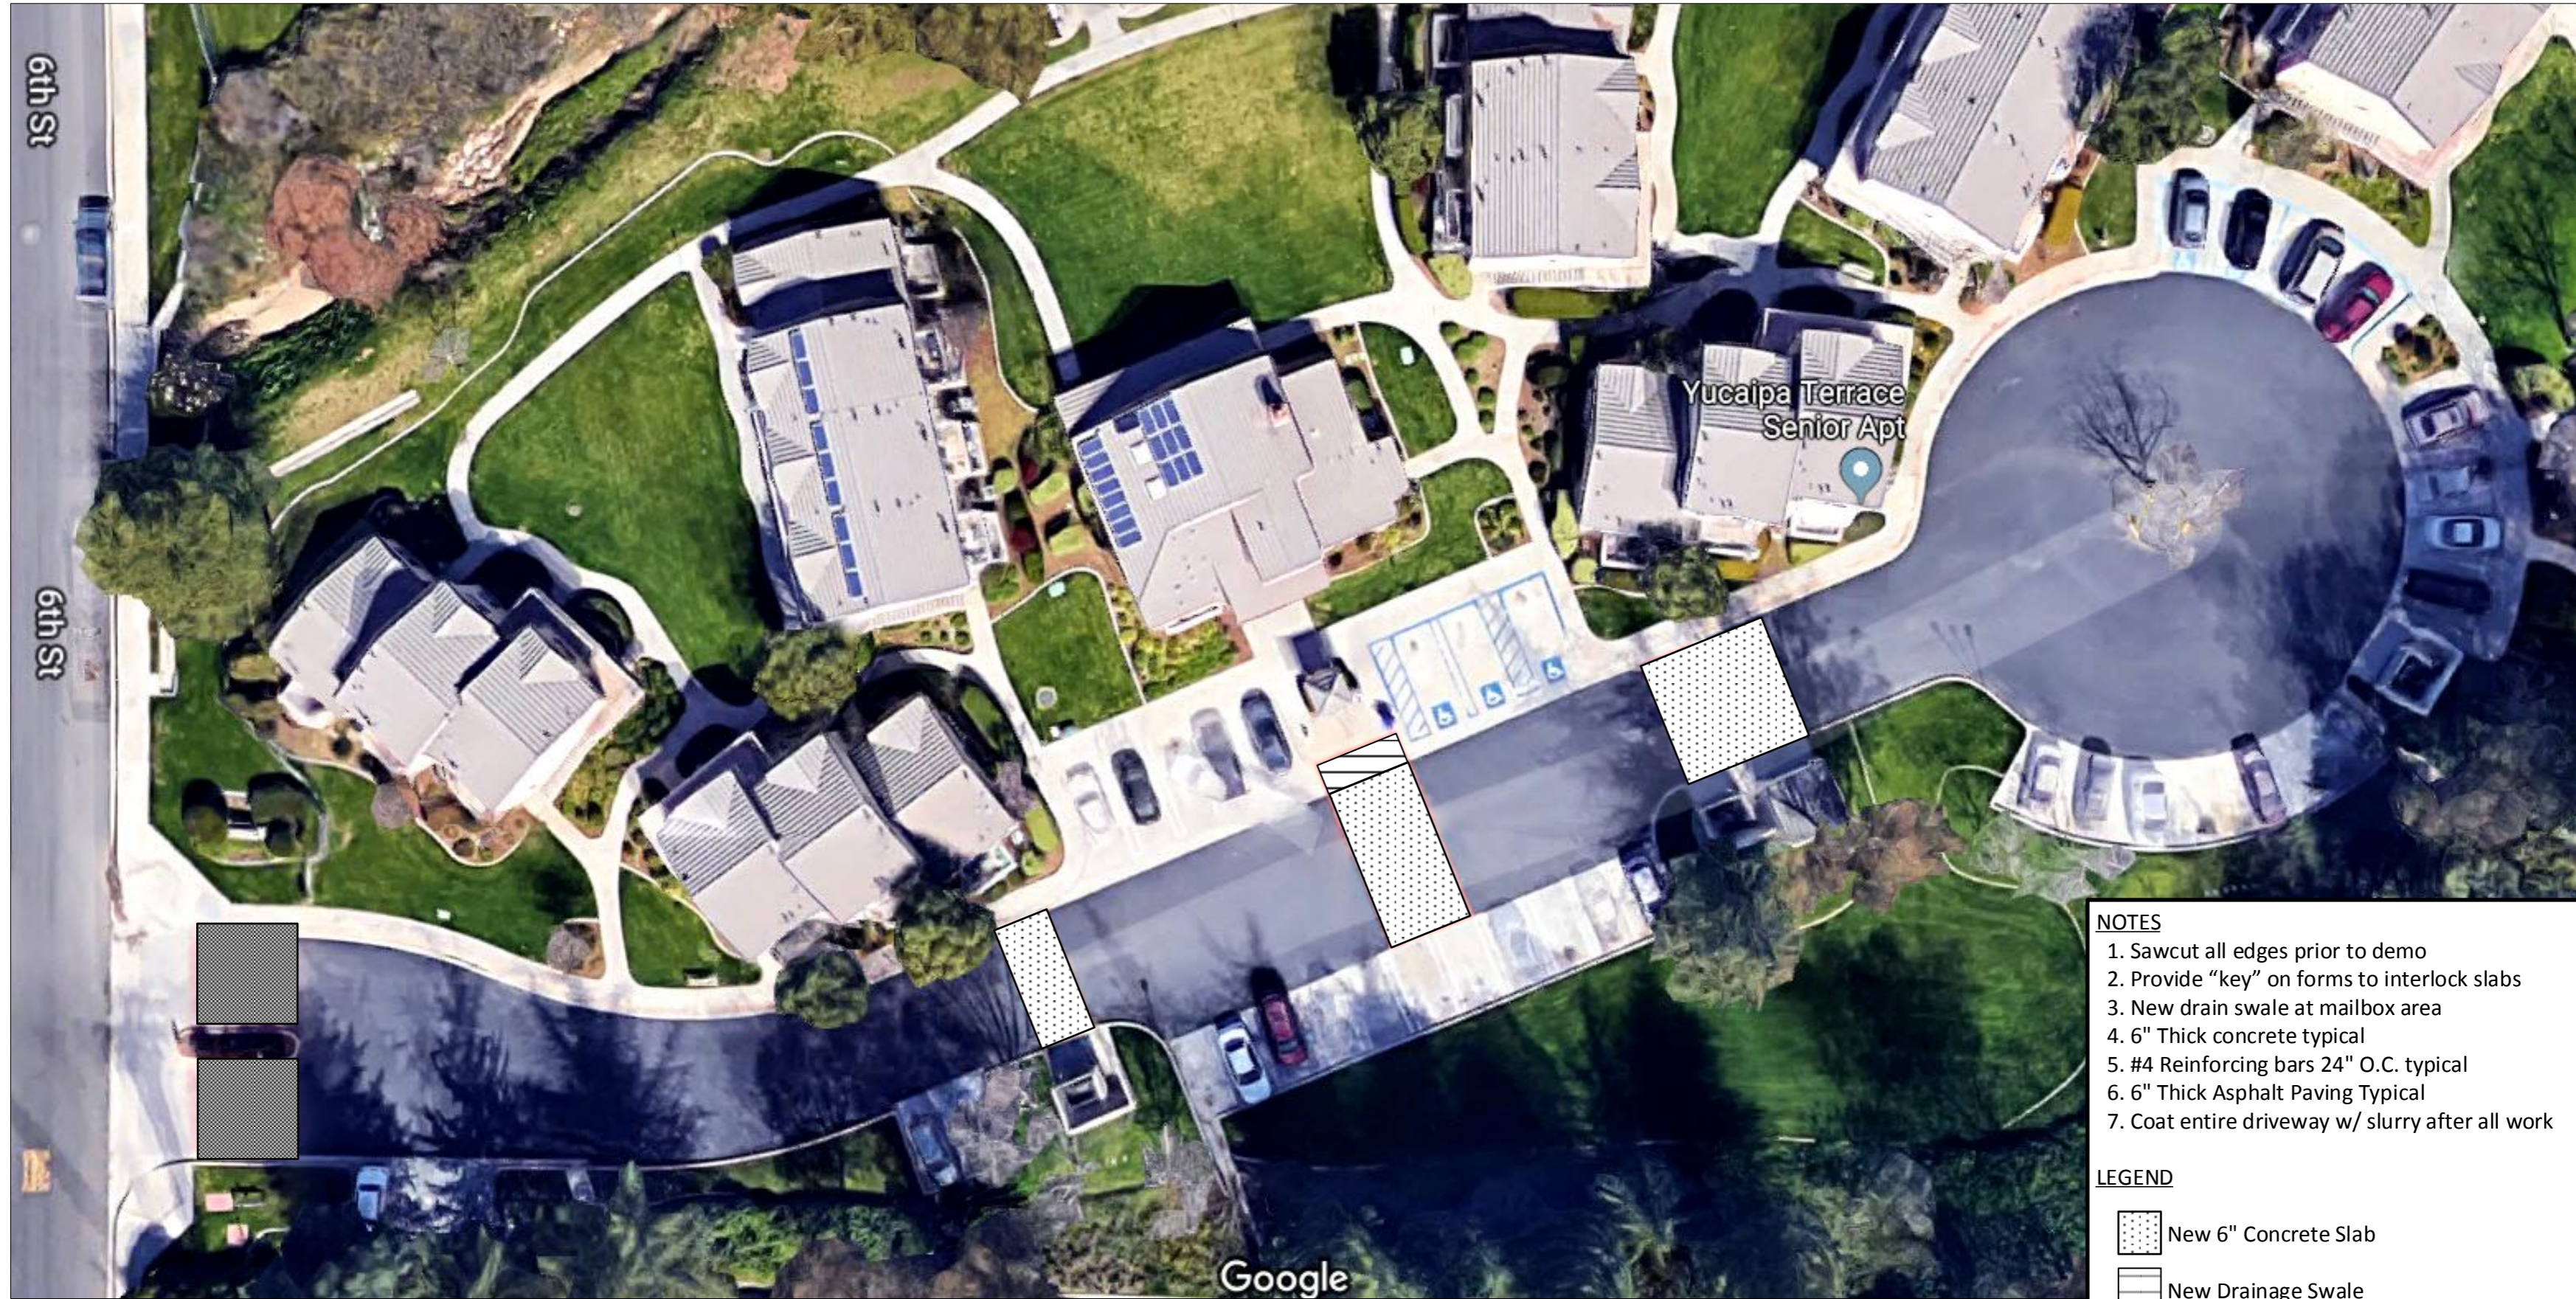





- NOTES**
- 1. Sawcut all edges prior to demo
 - 2. Demo existing concrete at shaded areas
 - 3. Remove & dispose of debris.
 - 4. Protect irrigation lines at sidewalk areas
 - 5. Remove all existing parking paint
 - 6. Grind trip hazards to within 1/4"

LEGEND

	Concrete Demo
	Concrete Grinding



- NOTES**
- 1. Sawcut all edges prior to demo
 - 2. Provide "key" on forms to interlock slabs
 - 3. New drain swale at mailbox area
 - 4. 6" Thick concrete typical
 - 5. #4 Reinforcing bars 24" O.C. typical
 - 6. 6" Thick Asphalt Paving Typical
 - 7. Coat entire driveway w/ slurry after all work

- LEGEND**
-  New 6" Concrete Slab
 -  New Drainage Swale
 -  New 6" Thick Asphalt